

**1.85mm PIN Diode Switch SPDT From
 100 MHz to 67 GHz Rated at +27 dBm**

The FMSW2026 is an SPDT ABSORPTIVE PIN DIODE SWITCH that operates over a wide frequency band from 0.1 to 67 GHz. J1 and J2 ports are terminated in 50 ohms when switched in the isolation (off) state. Electrical performance includes max. insertion loss of 10.5dB, max. return loss of -4dB, min. isolation of 40dB, and max. switching speed of 100nsec. TTL-compatible driver circuitry is included for accurate logic control. The design requires dual voltage controls of +5 Vdc and -5 Vdc, with an operational temperature range of -30°C to +60°C. External connectors include solder terminals, 1.85mm female connectors and an SMA female connector.



Features:

- SPDT Absorptive Switch
- 0.1 GHz to 67 GHz
- Insertion Loss 10.5 dB max
- Isolation 40 dB min
- Power Input +27 dBm CW max

Applications:

- Test & Measurement
- Military Communication
- Commercial Communication

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	0.1		67	GHz
Impedance		50		Ohms
Return Loss			-4	dB
Insertion Loss			10.5	dB
Isolation	40			dB
Switching Time			100	ns
Input Power (CW)			0.5	Watts
Positive Operating Voltage		5		V
Negative Operating Voltage		-5		V
Current @ 5 V		50		mA
Current @ -5 V		50		mA
Operating Temperature	-30		+60	deg C

Electrical Specification Notes:
 Specified switching time includes TTL driver delay.

Mechanical Specifications

Length	1 in [25.4 mm]
Width	1.2 in [30.48 mm]
Height	0.6 in [15.24 mm]
Package Type	Connectorized Module
Design	SPDT, Absorptive
RF Connector	1.85mm Female
Control Connector	SMA Female

Environmental Specifications

Temperature	
Operating Range	-30 to +60 deg C
ESD Sensitivity	ESD Sensitive Material. Transport material in Approved ESD bags. Handle only in ESD Workstation.




Fairview Microwave
 1130 Junction Dr. #100
 Allen, TX 75013
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
 www.fairviewmicrowave.com
 sales@fairviewmicrowave.com



Compliance Certifications (visit www.FairviewMicrowave.com for current document)


Plotted and Other Data

Notes:

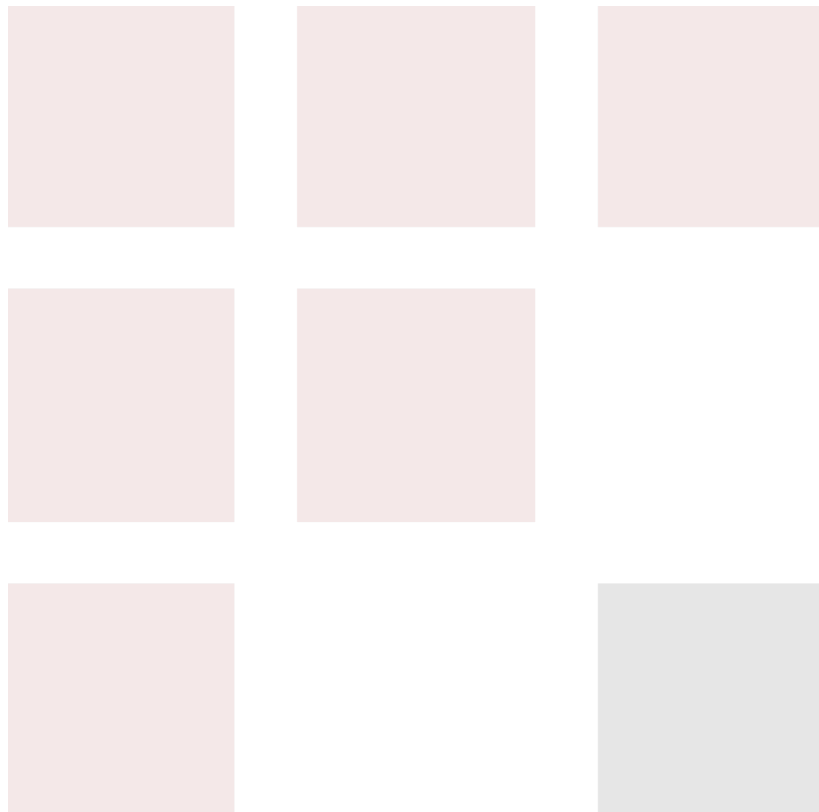

Typical Performance Data

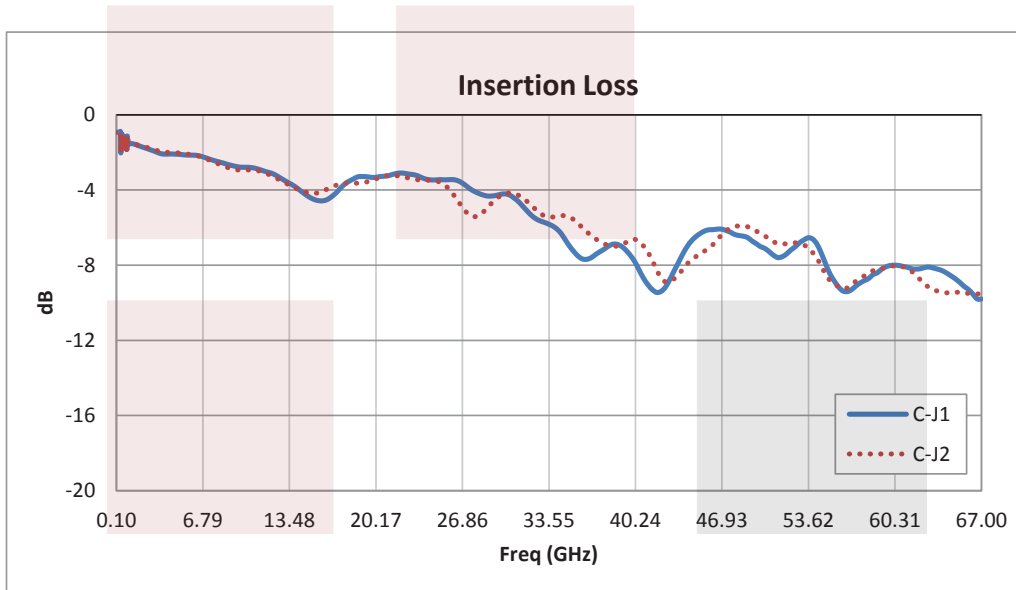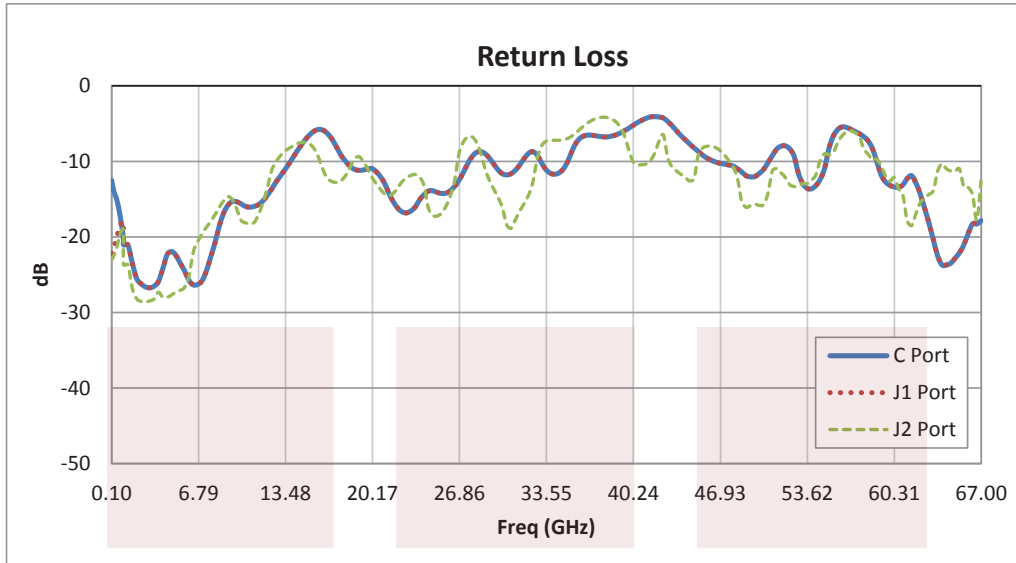

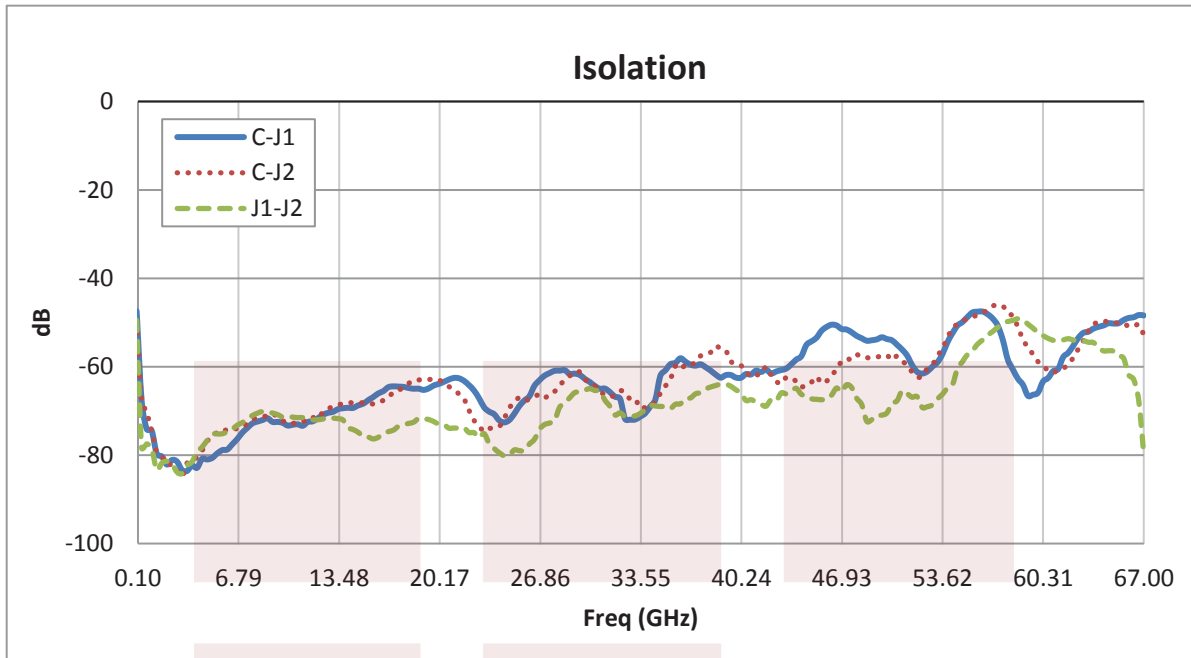


1.85mm PIN Diode Switch SPDT From 100 MHz to 67 GHz Rated at +27 dBm from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [1.85mm PIN Diode Switch SPDT From 100 MHz to 67 GHz Rated at +27 dBm FMSW2026](http://www.fairviewmicrowave.com/1.85mm-pin-diode-switch-spdt-100-mhz-67-ghz-rated-27-dbm-fmsw2026-p.aspx)

URL: <http://www.fairviewmicrowave.com/1.85mm-pin-diode-switch-spdt-100-mhz-67-ghz-rated-27-dbm-fmsw2026-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

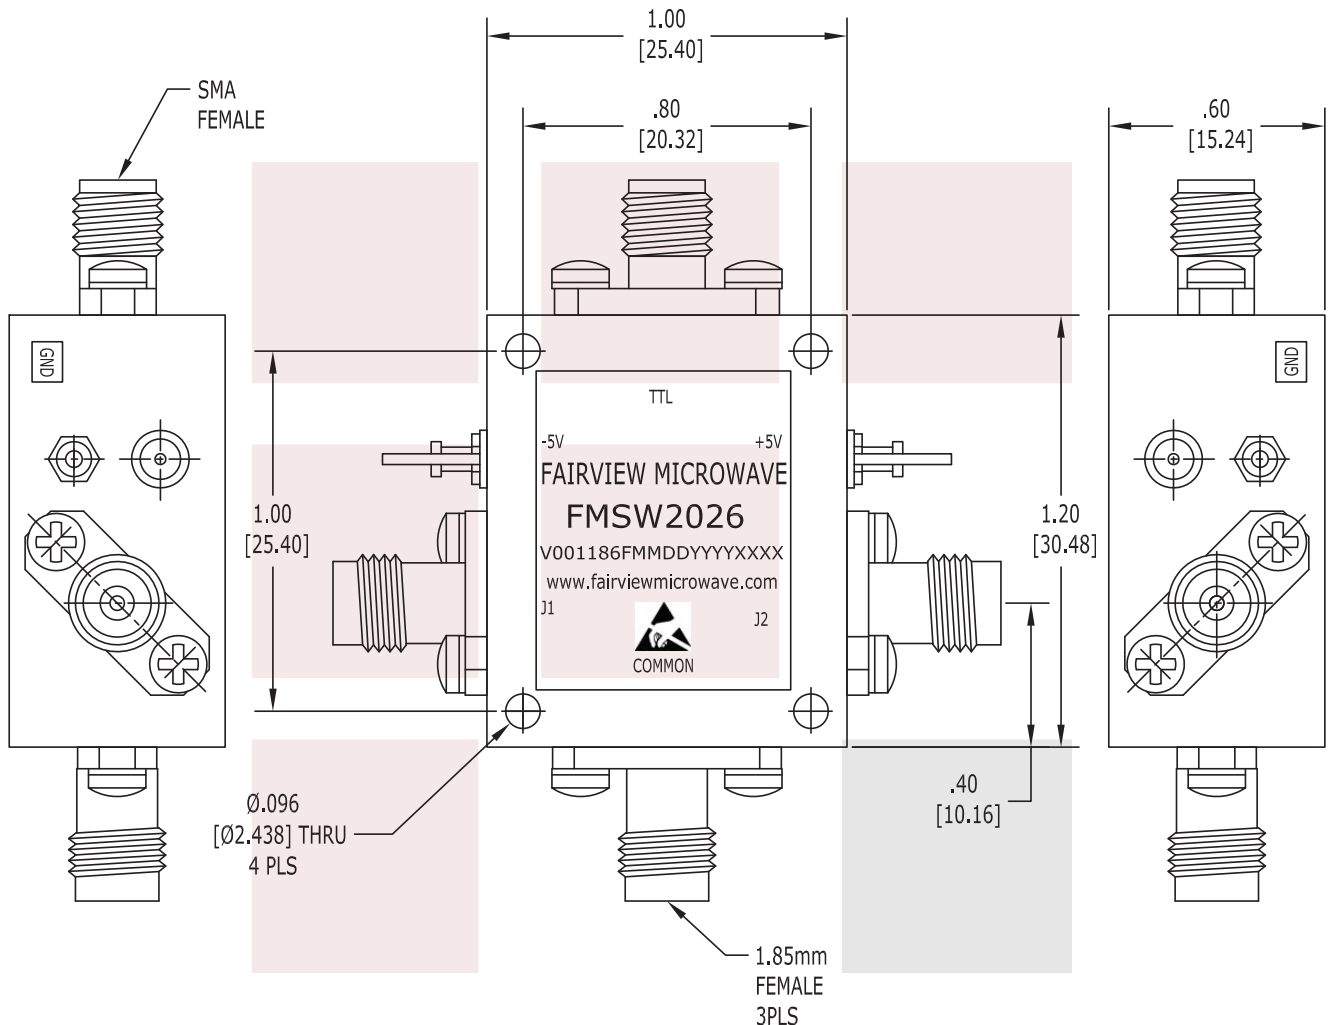

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN: inches
 TOLERANCES ARE: [mm]
 .XX ± .01 [± 2.54]
 .XXX ± .005 [± .127]

* THESE DIMENSIONS AND TOLERANCES
 SUPERSEDE NOTE #1 ON TITLE BLOCK.

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE 1.85mm PIN Diode Switch SPDT From 100 MHz to 67 GHz Rated at +27 dBm		DWG NO FMSW2026		CAGE CODE 3FKR5	
CAD FILE	121515	SHEET	SCALE	N/A	SIZE A 2233